




Roller chain 12B-1, zinc-aluminium coated - ELITE

Part no.: 81026838 Packaging Unit: 5m

Brand: ELITE Surface: zinc-aluminium coated

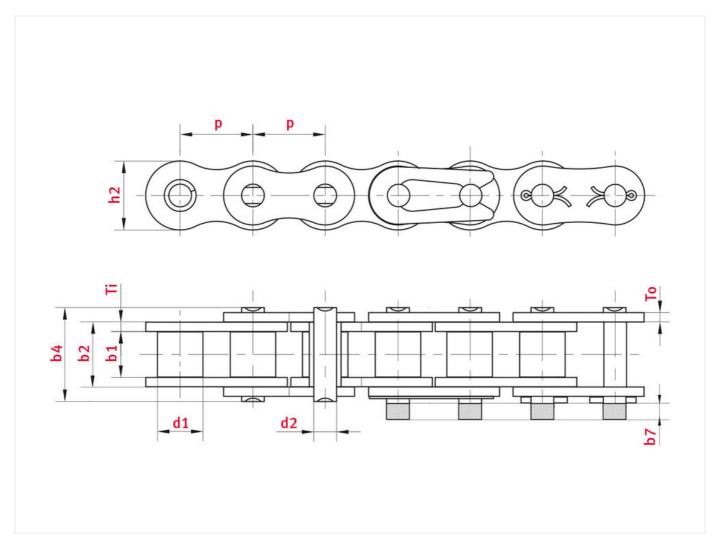

Technical data

ROLLER CHAIN	12B
Pitch p (mm)	19,05
Width between inner plates b1 min. (mm)	11,68
Roller diameter d1 max. (mm)	12,07

Product data

Pin diameter d2 max. (mm)	5,72
Pin length b4 max. (mm)	22,7
Max. add. length of connecting link b7 max. (mm)	4,6
Total width inner link b2 max. (mm)	15,62
Plate thickness Ti/To (mm)	1,85/1,85
Height inner plate h2 max. (mm) (JWIS: g)	16,13
Min. tensile strength ISO/DIN FU (kN)	28,9
Avg. tensile strength FB (kN)	33,3
Weight per meter (kg)	1,15
Bearing surface f (cm ²)	0,89

Product Information

The new zinc-aluminium coated chains "ZAP coated chains" have the best corrosion protection of all coated chains. The typical lamellar structure of these coatings provide a so-called "barrier effect" and high cathodic corrosion protection without the risk of hydrogen embrittlement. The coating also has a positive effect on friction in the chain bearing. The new ZAP coating will replace the previous Geomet and Dacromet chains.

Product highlights

- The dimensions of all zinc-plated and nickel-plated ELITE-chains comply with the requirements of ISO 606 and the chains are interchangeable with standard chains
- Zinc-plated and nickel-plated chains are prestretched to 30 % of breaking load
- All chain plates are tapered and zinc or nickel plated
- · Chains are fitted with seamless rollers; zinc or nickel plating available
- · Pins offer a high level of corrosion protection and wear resistance
- The load capacity of zinc- or nickel-plated ELITE chains is similar to that of comparable standard chains
- · Both chain types are generally supplied lightly oiled

Applications

- Packaging industry
- Solar and energy technology
- Wood processing industry
- Environmental technology, Recycling





https://www.iwis.com/en-gb/products-services/roller-chain-12b-1-zinc-aluminium-coated-elite~p3460

Useful information

